

## Clapgate Wimborne Infiltration Reduction Plan Summary

This provides an update on the last year's groundwater situation, what mitigation actions, if any, were taken and a summary of our action plan to prevent flooding due to groundwater infiltration of our sewer network.

### April 2022 – March 2023

2022-23 was a year of extremes for the Wessex Water region. One of the driest summers since 1976 was followed by one of the wettest autumn-winters in the last 10 years. This caused groundwater levels to rise in mid-January to a level comparable with 2013/14, with many catchments suffering from groundwater inundation.

As the winter progressed, the driest February in 30 years enabled many sites to recover, before the wettest March since 1981 resulted in a sharp increase in groundwater levels. This late wet period particularly affected sites in the northern and eastern parts of the region.

The groundwater levels reached critical levels in the Clapgate Wimborne catchment in 2022/23 and there were four reported backing up incidents due to Inadequate Hydraulic Capacity (IHC). The pumps at Clapgate SPS did not cope with the increased inflow and tankering had to be carried out.

### Action Plan

#### Annual Activity

Review asset and operational data and update annual reports.

Continue to review latest industry research to find innovative technology and methods to detect and prevent groundwater ingress into sewers.

Continue monitoring system performance using telemetry, rainfall records and local groundwater levels to inform the operational response during high-groundwater periods, and to monitor changing infiltration levels in the catchment.

Respond to customer contacts ensuring they are recorded, investigated and resolved in line with procedure.

Risk modelling of Wessex Water sewer network to plan pro-active CCTV surveys.

Proactive inspections and maintenance of sewerage assets.

Monitor and regulate surface water from new developments, through planning and development consultation.

Continue wider customer engagement, including public meetings when applicable. Upload Infiltration Reduction Plans and groundwater impact video on the Wessex Water website [LINK](#).

Engage in regular meetings with Lead Local Flood Authorities (LLFA) and other Risk Management Authorities where appropriate.

Liaise with the Environment Agency with regard to their groundwater warning service.

### Completed

Reviewed incidents of foul or surface water sewer flooding.

Shared long-term strategy with other Risk Management Authorities, for catchments where groundwater infiltration is an issue with other Risk Management Authorities.

Inspected public sewer network to identify points of infiltration.

Undertaken pumping station or flow surveys to analyse flows in sewers.

Sealed sewers and manholes to prevent groundwater infiltration.

Implemented a scheme to address capacity issues in the sewer network.

Communicated with other authorities during times of elevated groundwater levels and promoted a multiple agency approach.

### Short Term

Install in-sewer monitors at key locations to better understand flows in the network.

### Medium Term

Undertake pro-active inspection of public sewers and manholes using CCTV to identify points of infiltration.

Use Artificial Intelligence (AI) to code CCTV footage, increase survey efficiency and help identify defects and hotspots.

### Long Term

Analyse flows in sewers using pumping station surveys, flow surveys and/or hydraulic modelling.

Identify road gullies and other impermeable areas that are connected into the foul sewers and pass information on to the Council for further action.

Inspect private gullies, drains, and manholes where applicable. Where areas of infiltration in private drainage systems are found pass information on to the Council for further action.

Infiltration sealing of sewers and manholes, where deemed cost-effective, targeting work according to study findings.

### When Necessary


Implement emergency tankering procedure for preventing restricted toilet use and sewer flooding during high groundwater periods, in order to protect public health.

Implement Operational Mitigation Action Plan (OMAP) for discharging excess flows to the environment as a last resort, when tankering would not prevent restricted toilet use or sewer flooding, and public health is at risk.

## Current Performance

This graph compares incidents against Walford Mill River level and the flow from Clappgate Sewage Pumping Station (19081). Telemetry of the wet well level and pump activity at Clappgate SPS shows a correlation with groundwater levels in the region, particularly during the winter months; this demonstrates the impact of infiltration on the network.

Infiltration sealing in the catchment took place in 2017 and 2020, since then the number of incidents related to sewer flooding and service loss has reduced. However, tankering took place in 2022/23 during the winter months due to high groundwater levels leading to increased inflow. There have been 9 incidents attributed to IHC since 2019.

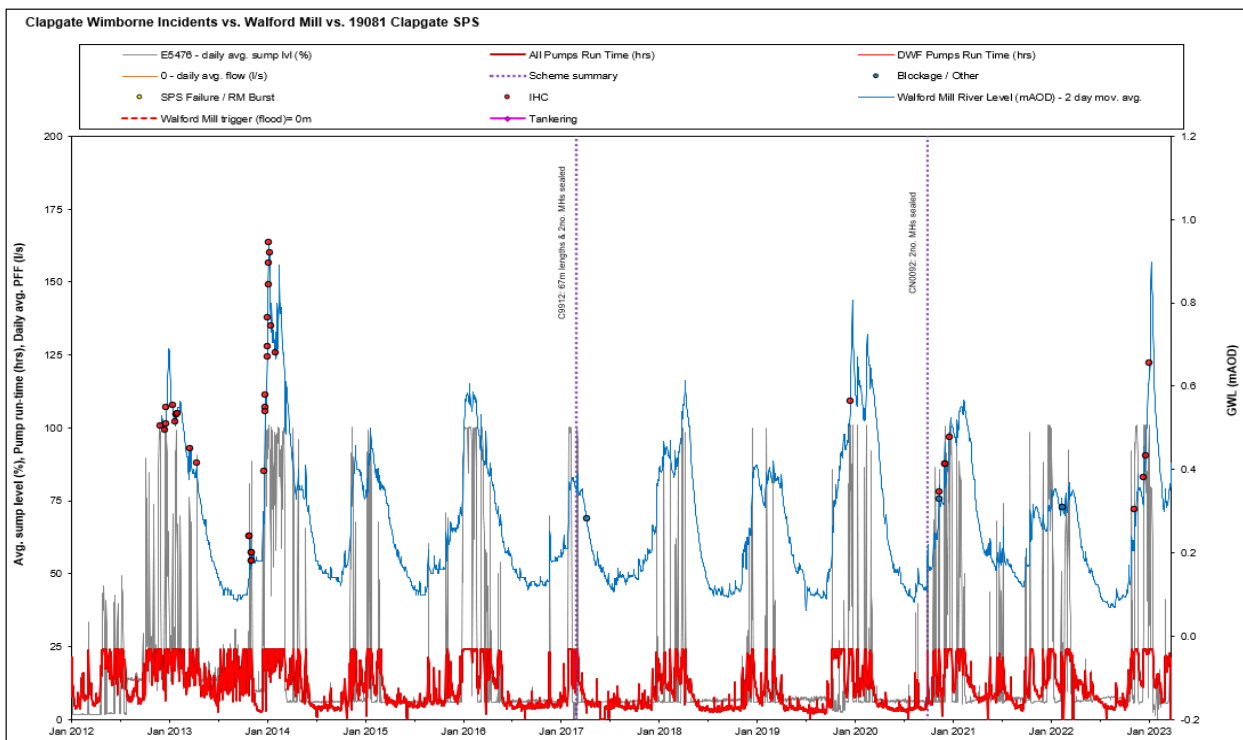

	2011-20	2020-21	2021-22	2022-23
Length of sewer inspected (m)	2045	-	-	-
Length of sewer sealed (m)	67	-	-	-